


Model Number Configuration Guide


Construct part number as follows:

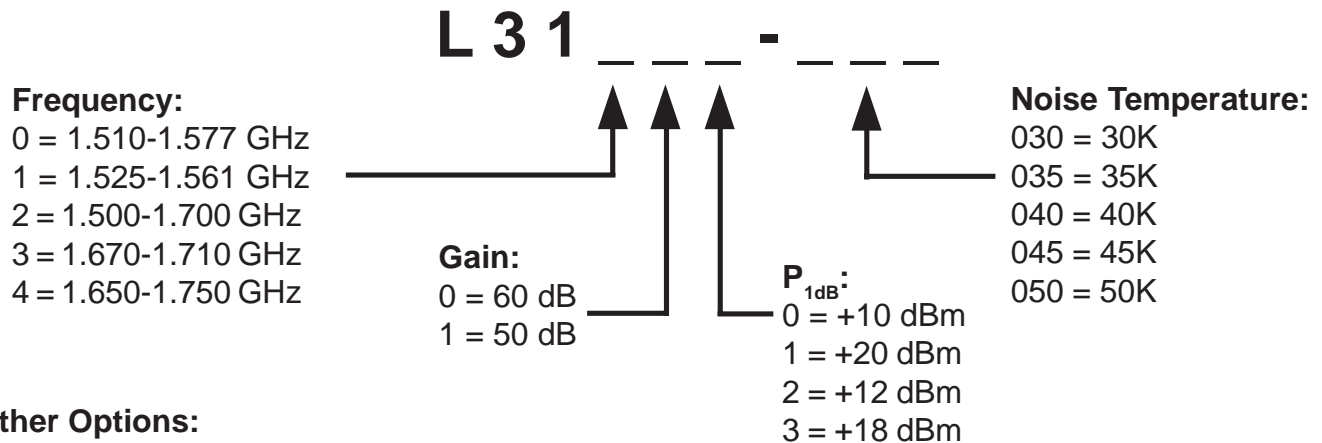

Other Options:

- Opt. 1: Type N female (std. = SMA Female)
- Opt. 2G: Green paint per Fed. Std. 595 chip # 34094 (std = White)
- Opt. 2T: Desert Tan paint per Fed. Std. 595 chip #33446 (std = White)
- Opt. 3: Dust cover for MS connector (std = no cover)
- Opt. 4: 110/220 VAC power supply (std = DC power)
- Opt. 5: Fault detector/alarm with 6 pin MS connector (4 pin std)
- Opt. 6: Type N Female Input Connector (std. = SMA Female)

Example: 1.525-1.561 GHz, 50 dB Gain, +20 dBm Output, 30K Noise, Green Paint

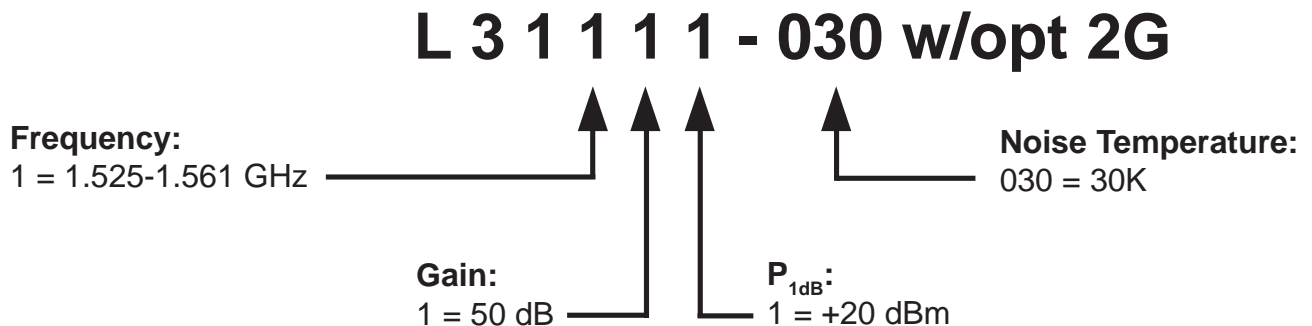

Please confirm configurations against product specifications, and with factory, prior to order.