


## Model Number Configuration Guide

Construct part number as follows:

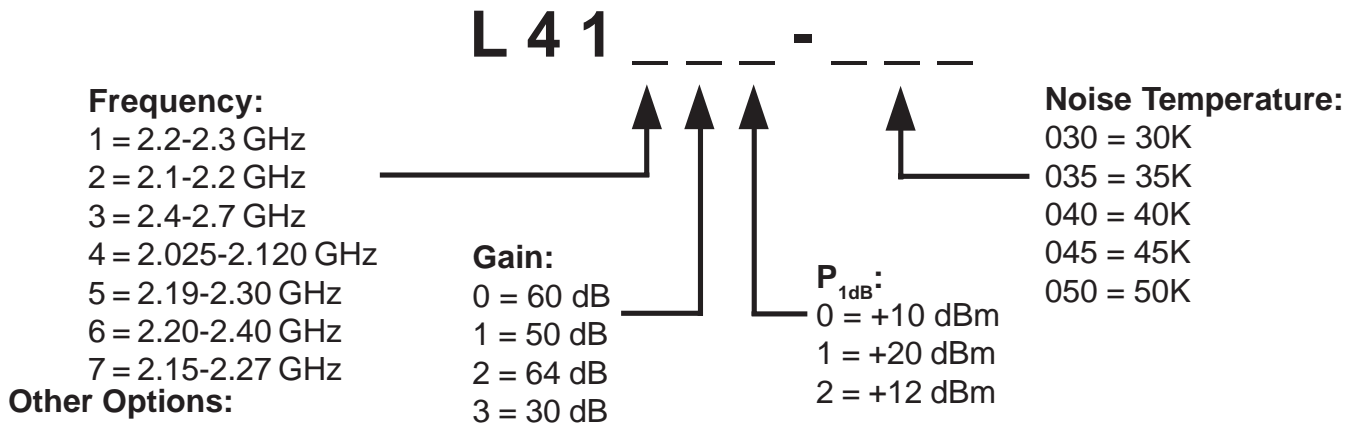

Opt. 1: Type N female, input & output (std. = SMA Female)

Opt. 2G: Green paint per Fed. Std. 595 chip # 34094 (std = White)

Opt. 2T: Desert Tan paint per Fed. Std. 595 chip #33446 (std = White)

Opt. 3: Dust cover for MS connector (std = no cover)


Opt. 4: 110/220 VAC power supply (std = DC power)

Opt. 5: Fault detector/alarm with 6 pin MS connector (4 pin std)

Opt. 6: Type N Female Input Connector (std. = SMA Female)

Opt. 7: Type N Female Output Connector (std = SMA Female)

**Example: 2.2-2.3 GHz, 50 dB Gain, +20 dBm Output, 30K Noise, Green Paint**

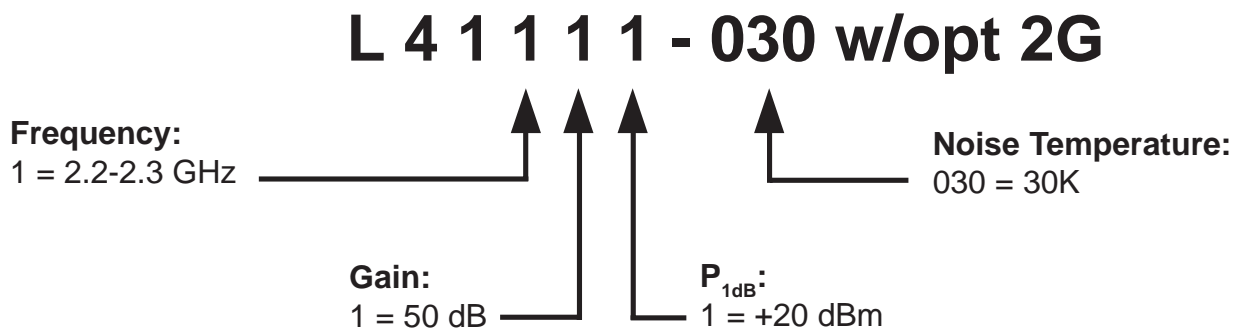

Please confirm configurations against product specifications, and with factory, prior to order.